

PORCELAIN WOOD



Arden

Product displayed is Arden Ash

A clean, uniform and contemporary floor covering for any kitchen, wet room or commercial environment, particularly where slip resistance and safety are paramount

14.4 x 59.3cm (5.7 x 23.3 inches)

  9.5mm thickness



Arden Ash



Arden Ebony



Arden Natural



Arden Walnut

Product displayed is Arden Ebony



anti-slip  R9

DEDICATED SLIP RESISTANCE. The Arden range is specifically designed to provide better safety in areas of pedestrian traffic, where the humidity conditions and slopes are greater than normal. Arden rates higher than the test results recommended by Regulation UNE-ENV 12633:2003.

cut and bevelled skirting tile
9.4 x 29.3 cm / 3.7 x 11.5 inches
Arden-R




Arden

Technical Characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm.)	9.5	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness.	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B la	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	Available on request	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< $9 \cdot 10^{-6} / ^\circ \text{C}$	UNE EN ISO 10545 Part 8
Thermic impact resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 9
Cracking resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 11
Frost resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 12
Slip resistance	Class 2 R9	UNE ENV 12633:2003

Chemical resistance

Domestic cleaning products	Type GA	UNE EN ISO 10545 Part 13
Swimming pool salt	Type GA	
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14

PORCELAIN WOOD

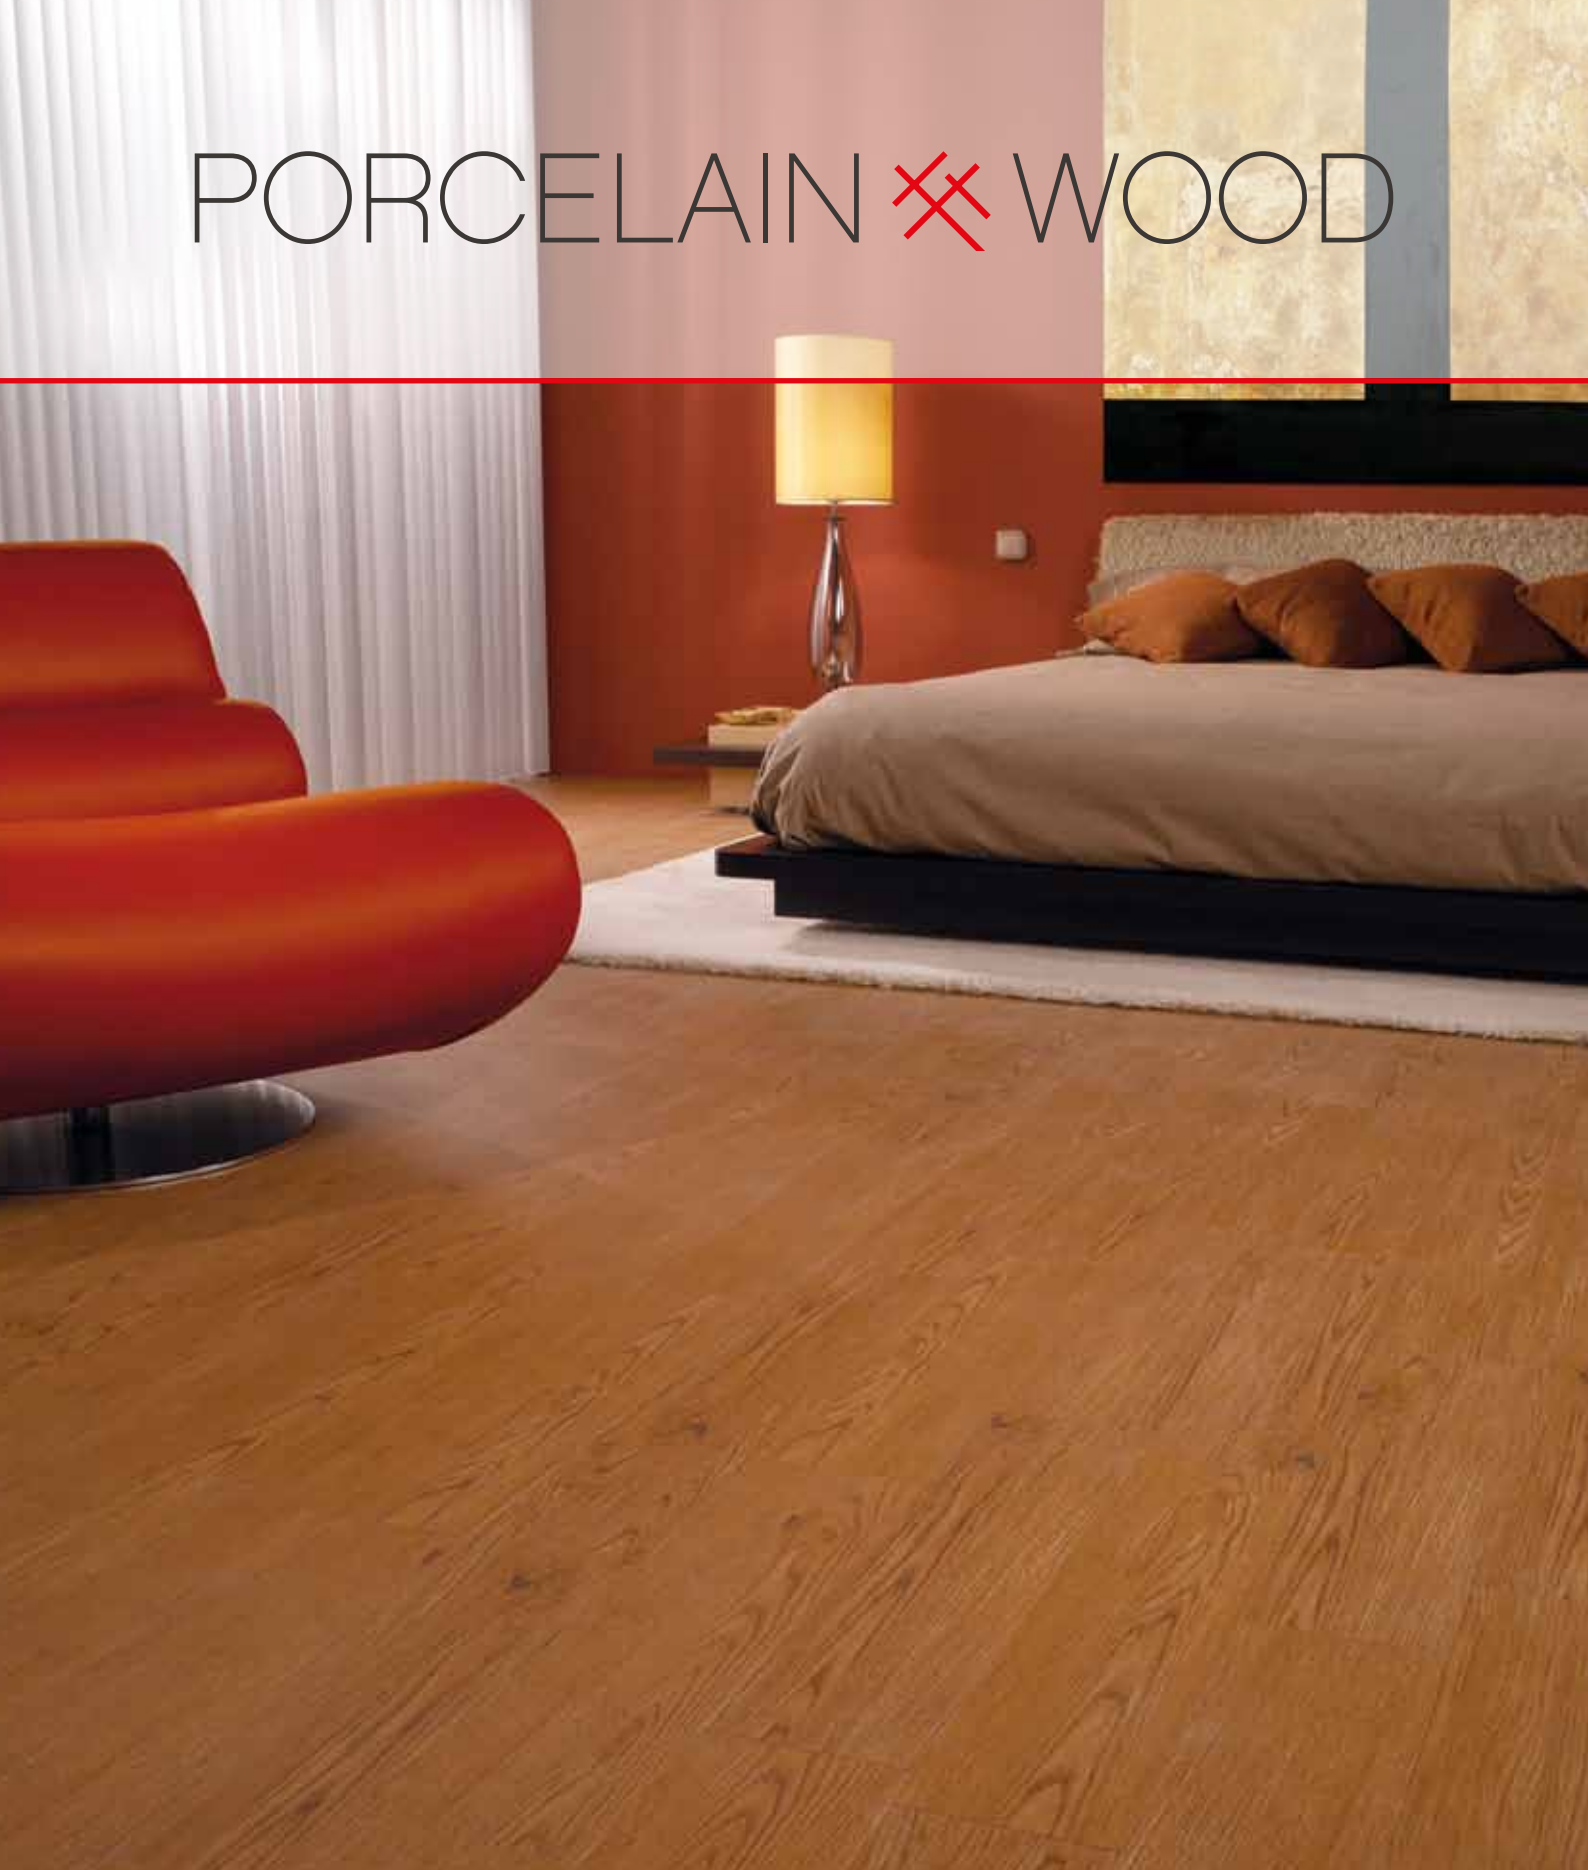

Product displayed is Arden Walnut

T +44 (0) 844 854 3050 E

E ask@porcelainwood.com

www.porcelainwood.com