




# PORCELAIN WOOD

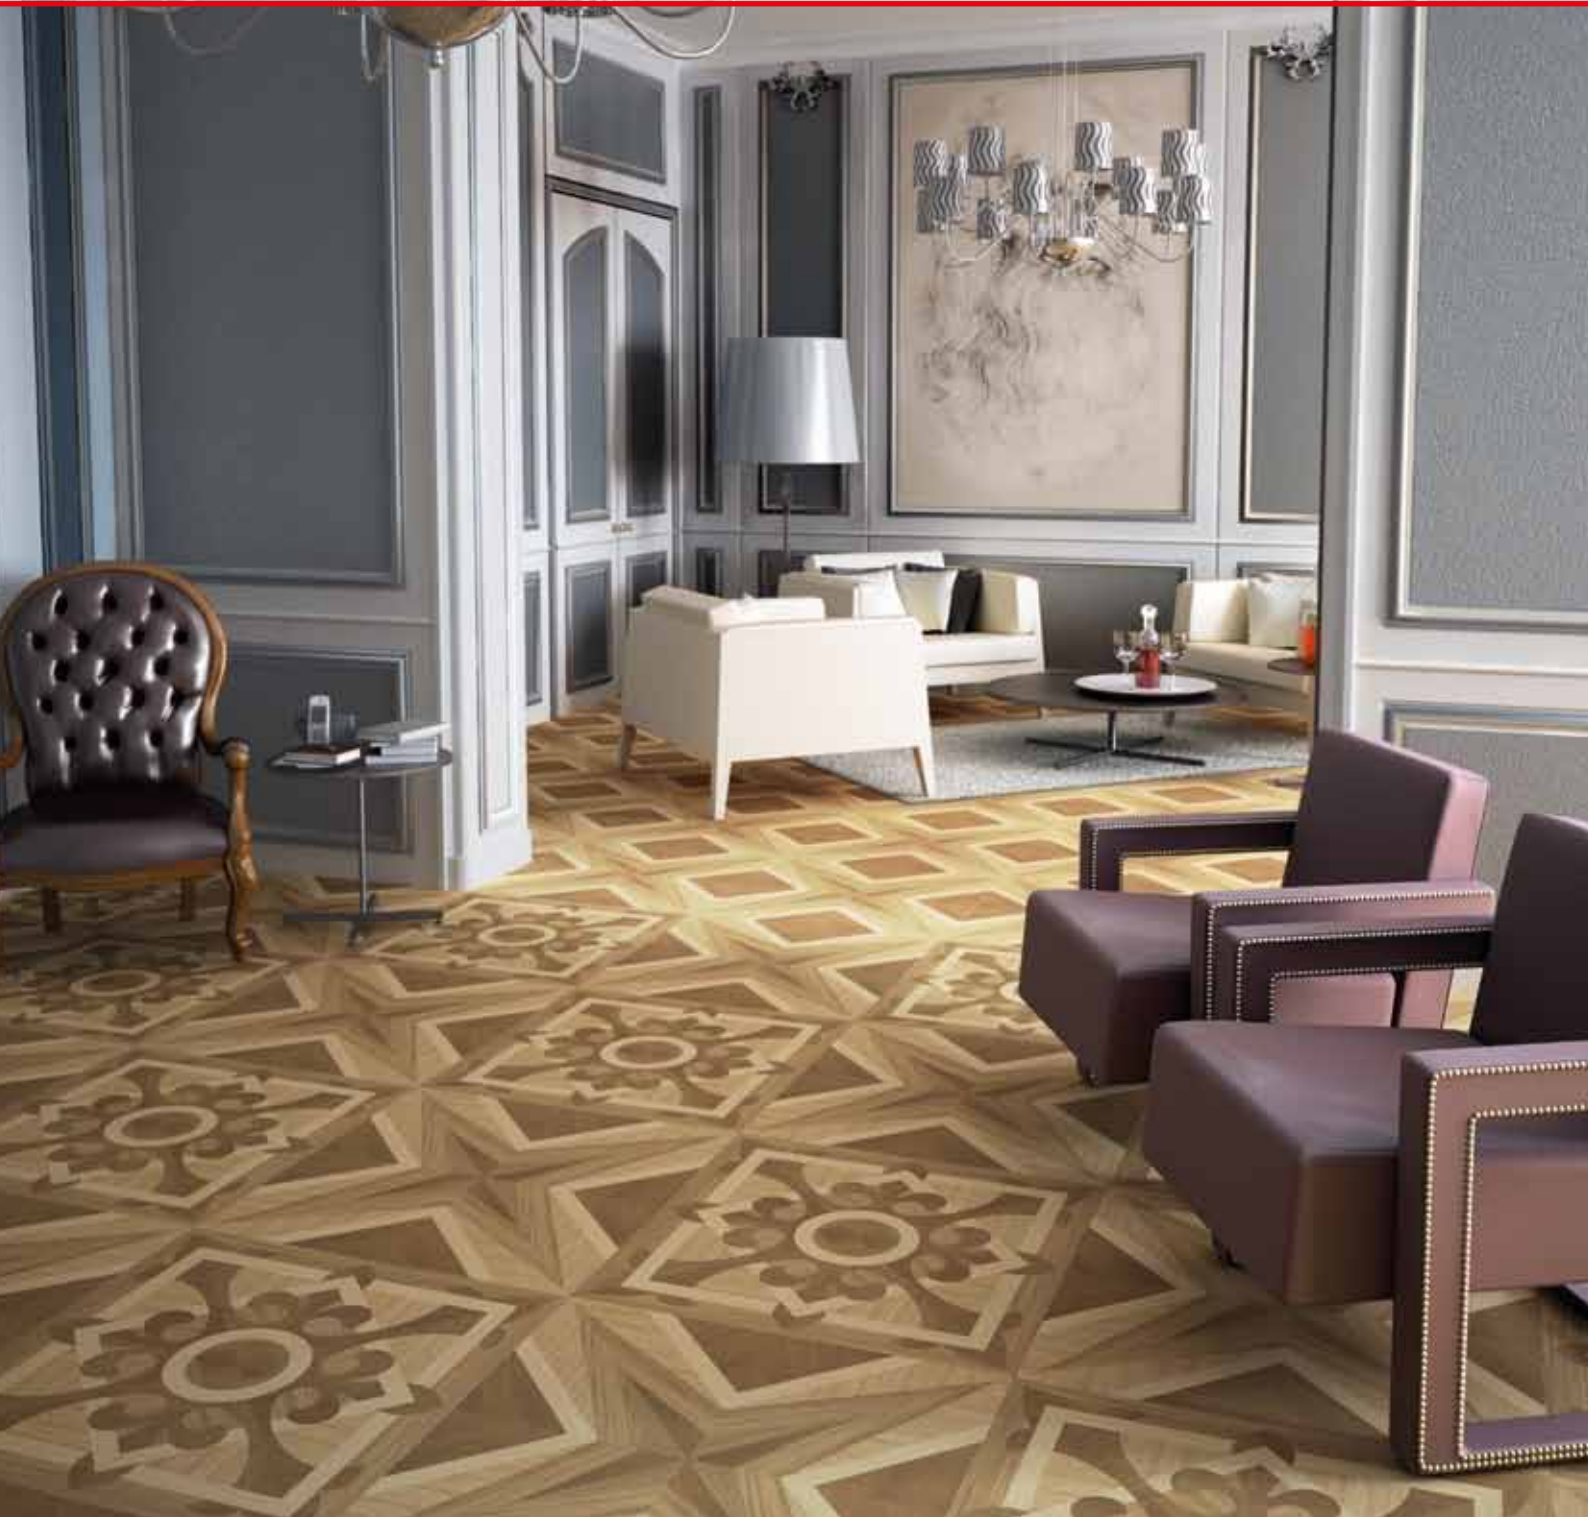

Products displayed are Bedgebury Scope and Bedgebury Median

## Bedgebury

A faithful and intricate representation of authentic parquet flooring, inspired by French designs for an awe-inspiring finish

45 x 45cm (17.7 x 17.7 inches)   9.5mm thickness

44.3 x 44.3cm (17.4 x 17.4 inches)   9.5mm thickness



Bedgebury Stack



Bedgebury Scope



Bedgebury Spira



Bedgebury Median

60 x 60cm (23.6 x 23.6 inches)   11mm thickness

59.3 x 59.3cm (23.3 x 23.3 inches)   11mm thickness



Bedgebury Stack



Bedgebury Scope



Bedgebury Spira



Bedgebury Median

cut and bevelled skirting tile  
9.4 x 45 cm / 3.7 x 17.7 inches  
Bedgebury



cut and bevelled skirting tile  
9.4 x 60 cm / 3.7 x 23.6 inches  
Bedgebury



9.4 x 44.3 cm / 3.7 x 17.4 inches  
Bedgebury-R

9.4 x 59.3 cm / 3.7 x 23.3 inches  
Bedgebury-R

To combine easily the different models of the Bedgebury series, we recommend you to use rectified pieces.


## Bedgebury

Technical Characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm.)	9.5	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness.	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B la	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	Available on request	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< $9 \cdot 10^{-6} / ^\circ \text{C}$	UNE EN ISO 10545 Part 8
Thermic impact resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 9
Cracking resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 11
Frost resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 12
Slip resistance	Class 1	UNE ENV 12633:2003

### Chemical resistance

Domestic cleaning products	Type GA	UNE EN ISO 10545 Part 13
Swimming pool salt	Type GA	
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14

# PORCELAIN WOOD

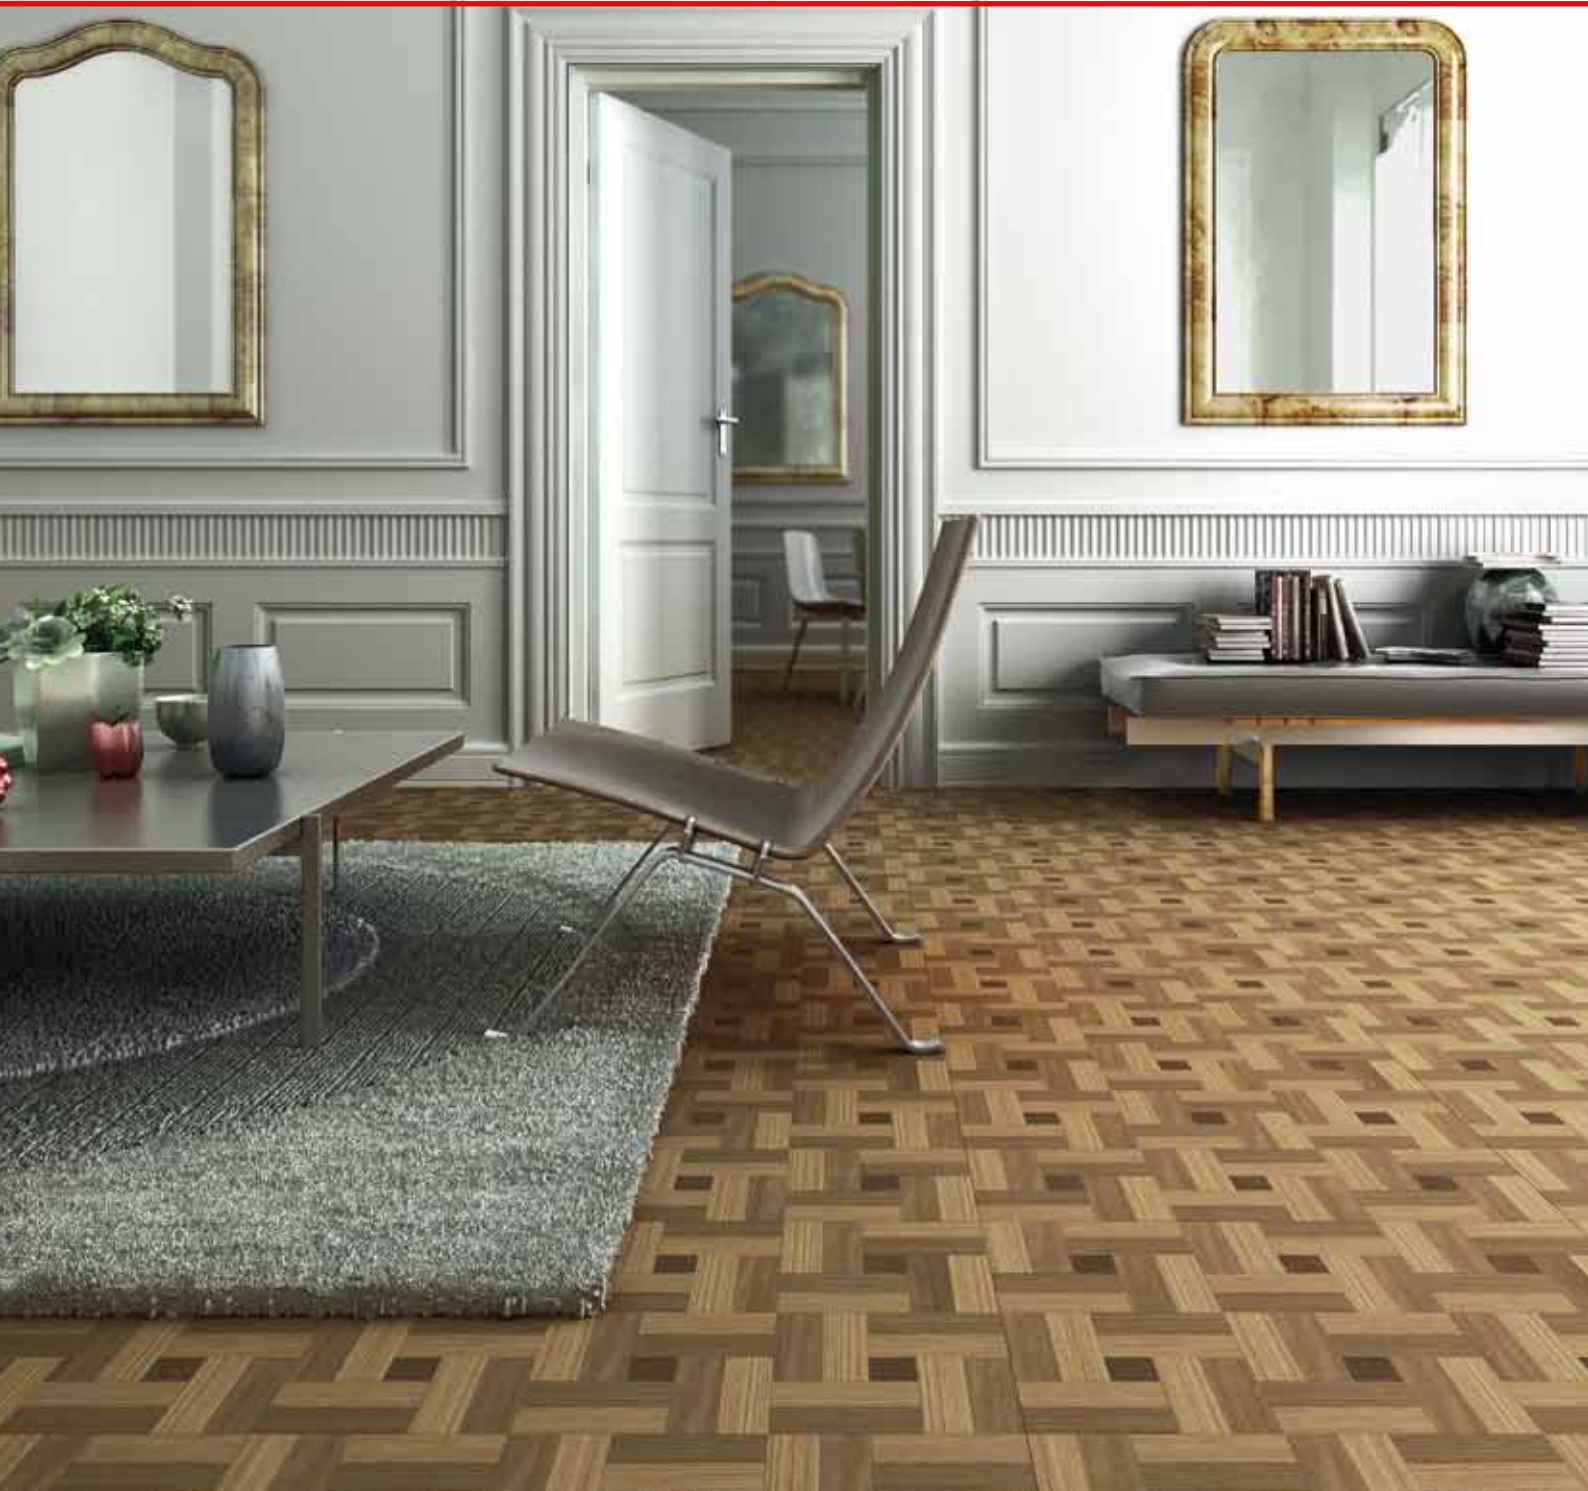

Product displayed is Bedgebury Stack

T +44 (0) 844 854 3050 E

E [ask@porcelainwood.com](mailto:ask@porcelainwood.com)

[www.porcelainwood.com](http://www.porcelainwood.com)