

PORCELAIN WOOD



Products displayed are Dalby Light (wall) and Dalby Coast (floor)

Dalby

A range of minimal, lime-washed wood grains that echo the aesthetic of a beach-side boardwalk

14.4 x 89.3cm (5.7 x 35.2 inches)



11.5mm thickness



Dalby Light



Dalby Hazlenut



Dalby Ash



Dalby Coast



Dalby Natural

anti-slip  R11

21.8 x 89.3cm (8.6 x 35.2 inches)



11.5mm thickness



Dalby Light



Dalby Hazlenut



Dalby Ash



Dalby Coast



Dalby Natural


anti-slip  R11

DEDICATED SLIP RESISTANCE. The Dalby range is specifically designed to provide better safety in areas of pedestrian traffic, where the humidity conditions and slopes are greater than normal. Dalby rates higher than the test results recommended by Regulation UNE-ENV 12633:2003.


cut and bevelled skirting tile
9.4 x 44.3 cm / 3.7 x 17.4 inches
Dalby-CR



staircase step
44.3 x 89.3 cm / 17.4 x 35.2 inches
Dalby-CR



step lip
44.3 x 89.3 cm / 17.4 x 35.2 inches
Dalby-CR



The staircase step and gradone can be sold with or without the ribbed notch. Angle is also available.


Dalby

Technical Characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm.)	11.5	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness.	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B la	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	Available on request	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< $9 \cdot 10^{-6} / ^\circ \text{C}$	UNE EN ISO 10545 Part 8
Thermic impact resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 9
Cracking resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 11
Frost resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 12
Slip resistance	Class 3 R11	UNE ENV 12633:2003

Chemical resistance

Domestic cleaning products	Type GA	UNE EN ISO 10545 Part 13
Swimming pool salt	Type GA	
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14

PORCELAIN WOOD

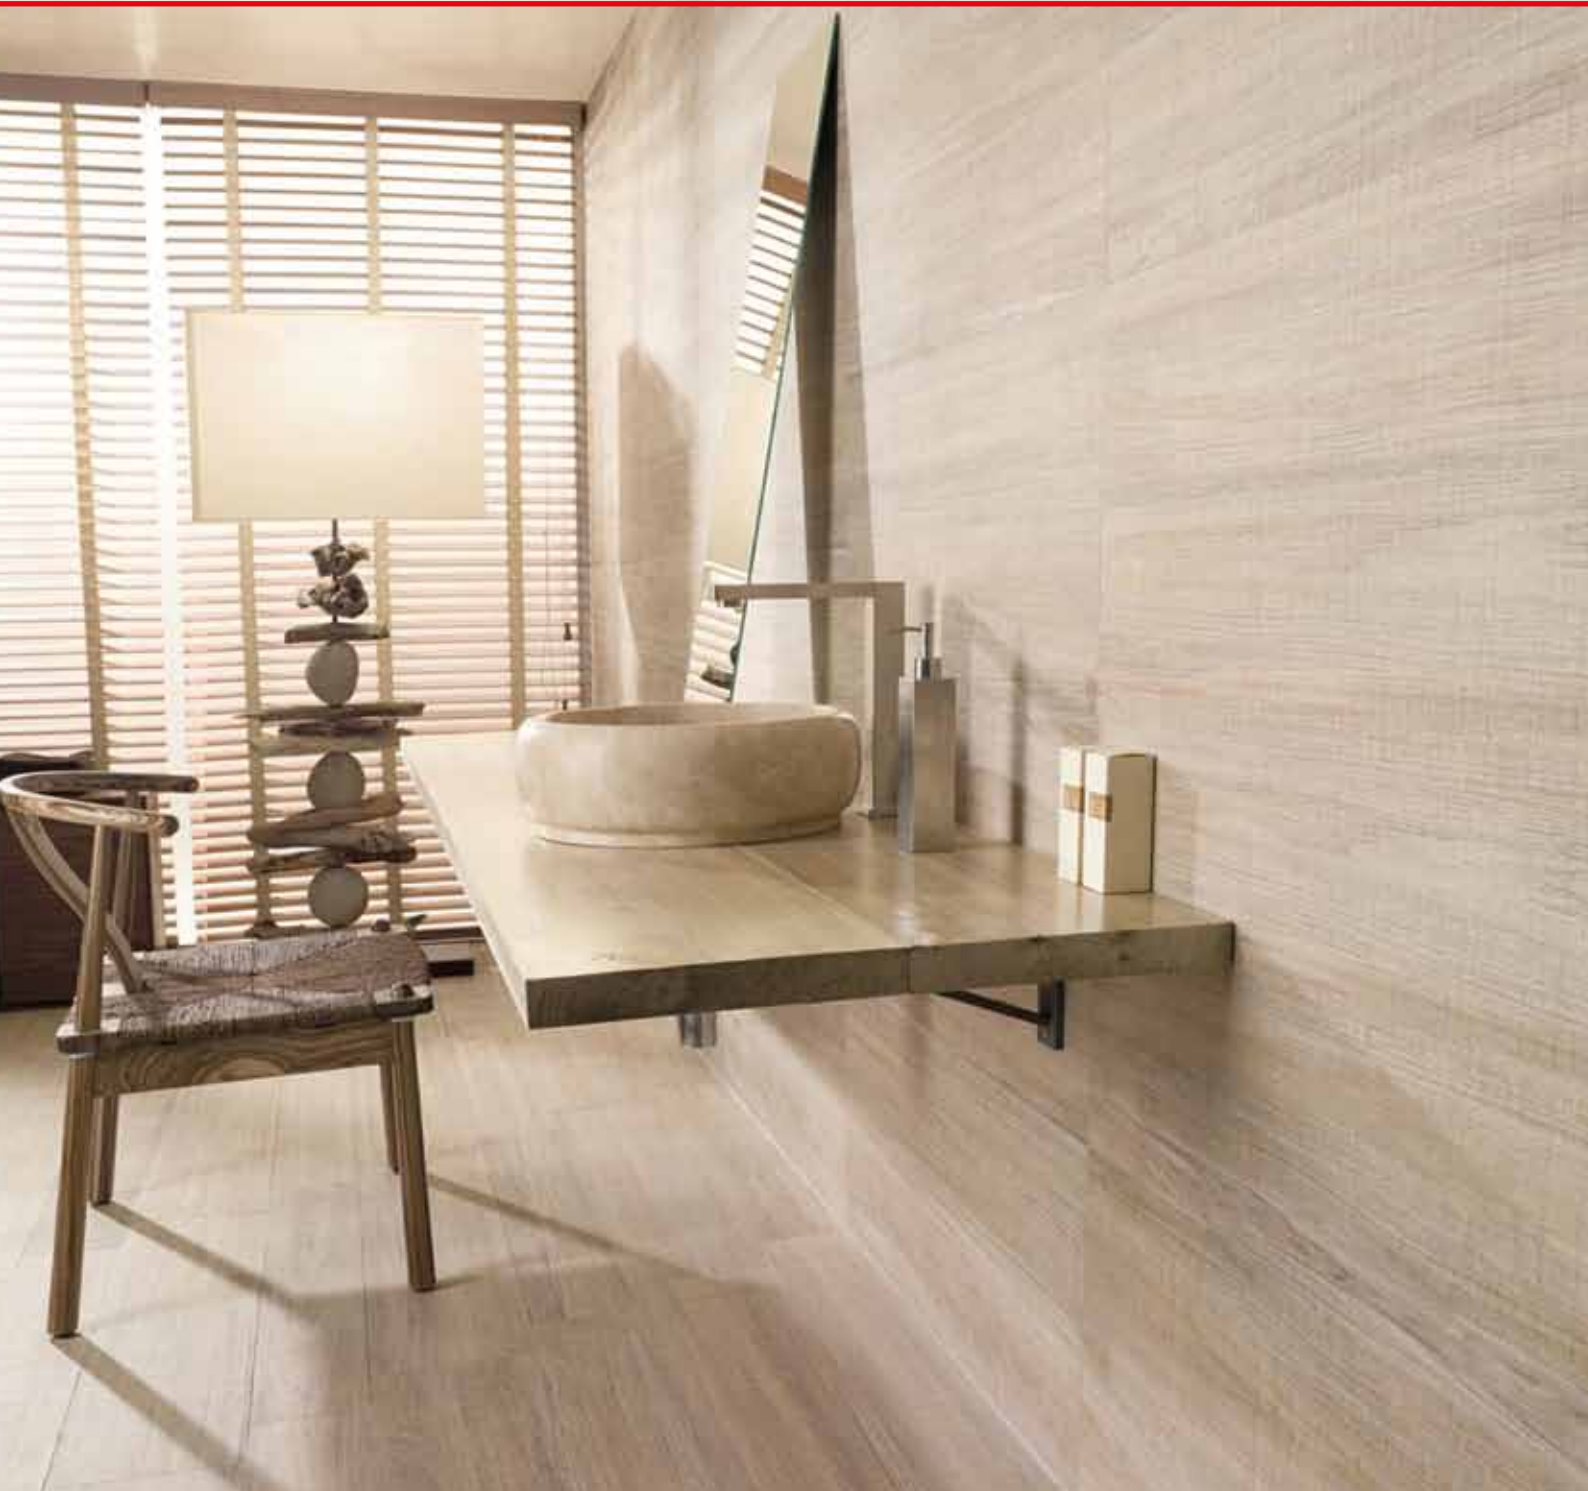

Product displayed is Dalby Hazlenut

T +44 (0) 844 854 3050 E

E ask@porcelainwood.com

www.porcelainwood.com