


# PORCELAIN WOOD

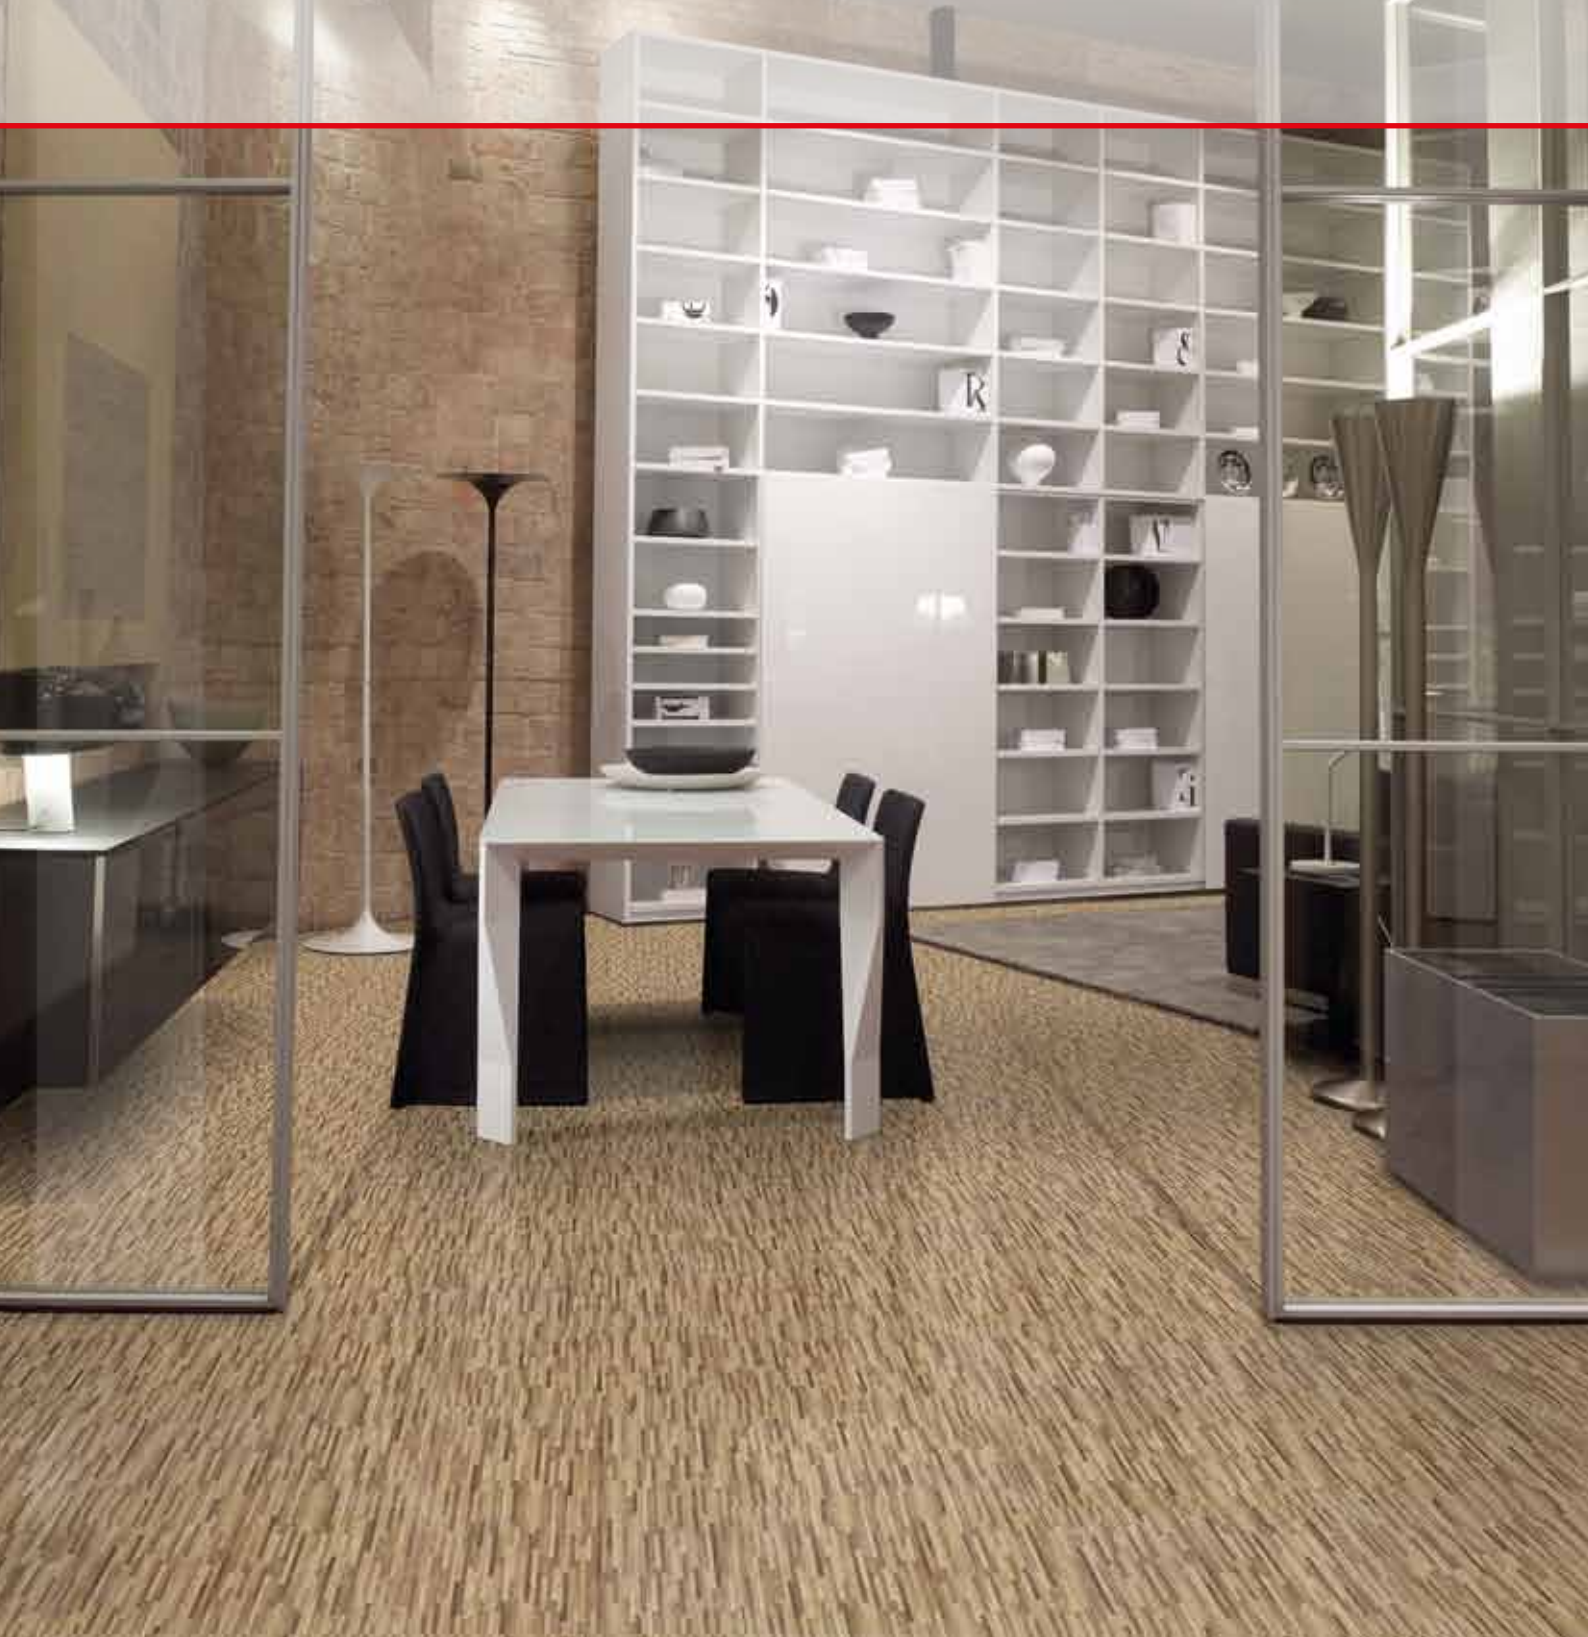

## Mercia

Product displayed is Mercia Matchstick

A faithful and intricate representation of authentic parquet flooring, inspired by French designs for an awe-inspiring finish

60 x 60cm (23.6 x 23.6 inches)



11mm thickness




Mercia Aged Block



Mercia Aged Cross




Mercia Coast Block



Mercia Coast Cross



Mercia Natural Block



Mercia Natural Cross

anti-slip  R10

59.3 x 59.3 cm (23.3 x 23.3 inches)




11mm thickness



Mercia Matchstick

anti-slip  R9

**DEDICATED SLIP RESISTANCE.** The Mercia range is specifically designed to provide better safety in areas of pedestrian traffic, where the humidity conditions and slopes are greater than normal. Mercia rates higher than the test results recommended by Regulation UNE-ENV 12633:2003.

cut and bevelled skirting tile  
 9.4 x 60 cm / 3.7 x 23.6 inches  
 Mercia-C 

9.4 x 59.3 cm / 3.7 x 23.3 inches  
 Mercia-CR

## Mercia

Technical Characteristics		Reference standard
Manufacture process	Single-firing	Dry pressed ceramic tile
Thickness (mm.)	11	UNE EN ISO 10545 Part 2
Length, width, thickness, side straightness, orthogonality, flatness.	Conforms to the requisites applicable to each model as defined in standard UNE-EN 14411 for Group B Ia	UNE EN ISO 10545 Part 2
Water absorption	E < 0.5 %	UNE EN ISO 10545 Part 3
Flexion resistance N/sq. mm. and breaking strength	> 35 > 1300	UNE EN ISO 10545 Part 4
Resistance to surface abrasion (Glazed tiles)	Available on request	UNE EN ISO 10545 Part 7
Lineal thermic dilatation	< $9 \cdot 10^{-6} / ^\circ \text{C}$	UNE EN ISO 10545 Part 8
Thermic impact resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 9
Cracking resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 11
Frost resistance	Conforms to industrial standard	UNE EN ISO 10545 Part 12
Slip resistance	Class 2 R9/R10	UNE ENV 12633:2003

### Chemical resistance

Domestic cleaning products	Type GA	UNE EN ISO 10545 Part 13
Swimming pool salt	Type GA	
Acids and bases (low concentration)	Minimum Type GLB	
Stains resistance	Minimum Type 4	UNE EN ISO 10545 Part 14

# PORCELAIN WOOD



Product displayed is Mercia Natural Cross

T +44 (0) 844 854 3050 E

E [ask@porcelainwood.com](mailto:ask@porcelainwood.com)

[www.porcelainwood.com](http://www.porcelainwood.com)